

Aprisa FE


Secure, narrow channel, point-to-point Ethernet radio ETSI licensed bands



Smart, cost effective, narrow channel, point-to-point Ethernet radio for low capacity linking and backhaul of DMR and industrial monitoring and control

New technologies, such as digital land mobile radio, need IP connectivity while cyber security concerns are driving the need for protected operation as standard even in low end applications. Aprisa FE introduces cost effective, secure IP over Ethernet linking, while utilising the industry proven VHF and UHF licensed bands – the mainstay for lower capacity linking and backhaul for public safety, transport and utility industries globally.

- **High capacity:** delivering an industry leading combination of capacity and distance the Aprisa FE provides data rates of up to 216 kbit/s in 50 kHz licensed channels.
- **Advanced IP connectivity:** selectable L2 Bridge or L3 Router modes, with VLAN, QoS and filtering attributes to support narrow bandwidth channels and mission critical traffic while meeting increasing security and IP network policy requirements.
- **Secure:** with its defence in depth approach, including AES encryption, authentication, L2 / L3 address filtering and L4 port application filtering and user access control, the Aprisa FE protects against vulnerabilities and malicious attacks.
- **Link efficiency:** adaptive modulation and forward error correction maintains the integrity of the wireless connection to ensure maximum capacity delivered continuously under varying atmospheric conditions.
- **Reliable and robust:** incorporating 4RF standard distance engineering RF design techniques, Aprisa FE maintains its high power output and performance over a wide temperature range without de-rating, delivering robust performance and long term reliability.
- **Easily managed:** an easy to use GUI supports full management of both local and remote terminals via HTTPS, and SNMP support allows network-wide monitoring and control via a third party network management system.

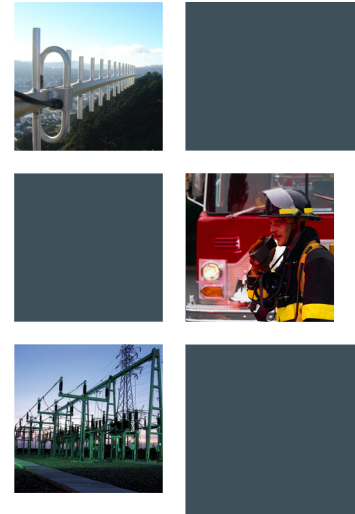

The Aprisa FE in brief

- Licensed narrow channel point-to-point Ethernet radio
- VHF and UHF licensed bands
- Ethernet – 4 port Layer 2 and 3
- Software selectable 12.5 kHz, 25 kHz, 50 kHz channel sizes
- Gross data rates up to 216 kbit/s
- Full duplex operation
- Internal and external pass band duplexer options
- 256, 192 or 128 bit AES encryption
- Adaptive coding and modulation: QPSK to 64 QAM
- Advanced forward error correction
- Dedicated alarm port
- -40 to +60 °C operational temperature
- 434 mm (W) x 300 / 440 mm (D) x 44.45 mm (H) (dependent on duplexer type)
- RED and ACMA standards compliant

Aprisa FE applications

Low cost, low capacity, digital mobile radio base station backhaul:

- Mid-tier public safety, first responders
- Taxis, buses and public transport
- Construction, mining and utility service vehicles
- Backhaul for third party RoIP (radio over IP linking) legacy analog adapters
- ETSI DMR, Motorola MOTOTRBO™ IP Site Connect systems, TaitNet™ DMR, NXDN™ Conventional IP link applications

Remote control, monitoring and site security applications throughout a range of public safety, critical infrastructure and utility industries:

- SCADA point-to-multipoint radio base station to master station linking
- AMI / AMR high density data concentrator backhaul
- Renewables monitoring and disconnect
- Traffic management and electronic sign telemetry
- Agriculture and weather station linking
- Site security alarms, tower management, remote transmitter shutdown
- Low-rate high resolution CCTV and automatic number plate reader backhaul (ANPR)

Motorola and MOTOTRBO are trademarks of Motorola Solutions, Inc
Tait and TaitNet are trademarks of Tait Ltd
NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation

SYSTEM SPECIFICATION

| GENERAL | | | | |
|---------------------------------------|---|---------------|-----------------|-----------------|
| NETWORK TOPOLOGY | Point-to-point | | | |
| NETWORK INTEGRATION | Ethernet | | | |
| PROTOCOLS | | | | |
| ETHERNET | IEEE 802.3, 802.1Q, 802.1p | | | |
| WIRELESS | Proprietary | | | |
| RADIO | | | | |
| | FREQ BAND | TUNING RANGE | TUNE STEP | |
| FREQUENCY RANGE | 135 MHz | 135 – 175 MHz | 0.625 kHz | |
| | 320 MHz | 320 – 400 MHz | 6.25 kHz | |
| | 400 MHz | 400 – 470 MHz | 1.25 kHz | |
| | 450 MHz | 450 – 520 MHz | 6.25 kHz | |
| CHANNEL SIZE | 12.5 kHz, 25 kHz and 50 kHz software selectable | | | |
| DUPLEX | Dual frequency full-duplex | | | |
| FREQUENCY STABILITY | 320 MHz \pm 1.0 ppm 135 / 400 / 450 MHz \pm 0.5 ppm | | | |
| FREQUENCY AGING | < 1 ppm / annum | | | |
| TRANSMITTER | | | | |
| MAX PEAK ENVELOPE POWER (PEP) | 7.9 W (+39 dBm) | | | |
| AVERAGE POWER OUTPUT | 64 QAM 0.01 – 1.6 W (+10 to +32 dBm, in 1 dB steps) 16 QAM 0.01 – 2.0 W (+10 to +33 dBm, in 1 dB steps) QPSK 0.01 – 3.2 W (+10 to +35 dBm, in 1 dB steps) | | | |
| ADJACENT CHANNEL POWER | < -60 dBc | | | |
| TRANSIENT ADJACENT CHANNEL POWER | < -60 dBc | | | |
| SPURIOUS EMISSIONS | < -37 dBm | | | |
| RECEIVER | | | | |
| | | 12.5 kHz | 25 kHz | 50 kHz |
| SENSITIVITY (BER < 10 ⁻⁹) | max coded 64 QAM | -101 dBm | -97 dBm | -94 dBm |
| | max coded 16 QAM | -108 dBm | -105 dBm | -102 dBm |
| | max coded QPSK | -113 dBm | -110 dBm | -107 dBm |
| ADJACENT CHANNEL SELECTIVITY | | > -45 dBm | > -35 dBm | > -35 dBm |
| | (Note 1) | [> 48 dB] | [> 58 dB] | [> 58 dB] |
| CO-CHANNEL REJECTION max coded QPSK | > -10 dB | | | |
| CO-CHANNEL REJECTION max coded 64 QAM | > -20 dB | | | |
| INTERMODULATION RESPONSE REJECTION | > -33 dBm [> 60 dB Note 1] | | | |
| BLOCKING OR DESENSITISATION | > -15 dBm [> 78 dB Note 1] | | | |
| SPURIOUS RESPONSE REJECTION | > -30 dBm [> 63 dB Note 1] | | | |
| MODEM | | | | |
| | | 12.5 kHz | 25 kHz | 50 kHz |
| GROSS DATA RATE | 64 QAM | 60 kbit/s | 120 kbit/s | 216 kbit/s |
| | 16 QAM | 40 kbit/s | 80 kbit/s | 144 kbit/s |
| | QPSK | 20 kbit/s | 40 kbit/s | 72 kbit/s |
| FORWARD ERROR CORRECTION | Concatenated Reed Solomon plus variable coding rate convolutional code | | | |
| ADAPTIVE BURST SUPPORT | Adaptive FEC Adaptive modulation | | | |
| DUPLEXER | | | | |
| | MOUNTING | PASS BAND | TX / RX SPLIT | FREQUENCY BANDS |
| | External | 0.5 MHz | \geq 4.6 MHz | 135 MHz |
| | Internal / External (+1U) | 0.5 MHz | \geq 5.0 MHz | 320, 400 MHz |
| | Internal / External (+1U) | 2.0 MHz | \geq 9.45 MHz | 320, 400 MHz |
| | External | 0.5 MHz | \geq 5.0 MHz | 450 MHz |

| SECURITY | |
|--------------------------|--|
| DATA ENCRYPTION | 256, 192 or 128 bit AES |
| DATA AUTHENTICATION | CCM |
| INTERFACES | |
| ETHERNET | 4 port RJ45 10/100Base-T switch |
| MANAGEMENT | 1 x USB micro type B (device port) 1 x USB standard type A (host port) 1 x Alarm port RJ45 |
| ANTENNA | 1 x N-type Female 50 ohm |
| LEDs | Status: OK, MODE, AUX, TX, RX Diagnostics: RSSI, traffic port status |
| RSSI BUTTON | Toggles LEDs between RSSI test / product status |
| PRODUCT OPTIONS | |
| CHASSIS OPTIONS | Chassis options of 300 mm / 440 mm for internal and external duplexer options depending on frequency band and duplexer size |
| POWER | |
| INPUT VOLTAGE | 10 – 30 VDC (13.8 V nominal) |
| RECEIVE | All bands except 320 MHz < 3 W 320 MHz < 7 W |
| TRANSMIT | 135 MHz < 26 W 320 MHz < 35 W 400 and 450 MHz < 28 W |
| MECHANICAL | |
| DIMENSIONS | 300 CHASSIS 434 mm (W) x 300 mm (D) x 44.45 mm (H) 1 RU 17.1" (W) x 11.8" (D) x 1.75" (H) 440 CHASSIS 434 mm (W) x 440 mm (D) x 44.45 mm (H) 1 RU 17.1" (W) x 17.3" (D) x 1.75" (H) |
| WEIGHT | 5.0 kg (11.3 lbs) (dependant on duplexer type) |
| MOUNTING | Rack mount 19" 1U high (internal duplexer) |
| ENVIRONMENTAL | |
| OPERATING TEMPERATURE | -40 to +60 °C (-40 to +140 °F) |
| HUMIDITY | Maximum 95 % non-condensing |
| MANAGEMENT & DIAGNOSTICS | |
| LOCAL ELEMENT | SSH and HTTP/S web servers with full control / diagnostics Partial diagnostics via LEDs and test button Software upgrade from PC or USB flash drive |
| REMOTE ELEMENT | SSH and HTTP/S over-the-air remote element management with control / diagnostics |
| NETWORK | SNMPv2 and SNMPv3 security support for integration with external network management systems |
| COMPLIANCE | |
| RF | 12.5 kHz EN 300 113 25 kHz and 50 kHz EN 302 561 |
| EMC | EN 301 489-1 and 5 |
| SAFETY | EN 60950 |
| ENVIRONMENTAL | ETS 300 019 Class 3.4 |

Notes:

- The receiver figures are shown in typical fixed interference dBm values and dB values [in brackets] relative to the sensitivity. Relative values are given for QPSK modulation and max coded FEC. Refer to the Aprisa FE User Manual for a complete list of modulation and coding levels.

ABOUT 4RF

Operating in more than 140 countries, 4RF provides radio communications equipment for critical infrastructure applications. Customers include utilities, oil and gas companies, transport companies, telecommunications operators, international aid organisations, public safety, military and security organisations. 4RF point-to-point and point-to-multipoint products are optimized for performance in harsh climates and difficult terrain, supporting IP, legacy analogue, serial data and PDH applications.

Copyright © 2017 4RF Limited. All rights reserved. This document is protected by copyright belonging to 4RF Limited and may not be reproduced or republished in whole or part in any form without the prior written consent of 4RF Limited. While every precaution has been taken in the preparation of this literature, 4RF Limited assumes no liability for errors or omissions, or from any damages resulting from the use of this information. The contents and product specifications within it are subject to revision due to ongoing product improvements and may change without notice. Aprisa and the 4RF logo are trademarks of 4RF Limited.



For more information please contact
EMAIL sales@4rf.com
URL www.4rf.com

Version 1.6.0